

Chime Kit

CM-4L KIT


Product Specifications

1. Features

- Operates on 12V AC/DC
- 0-85 Db adjustable sound
- 2 distinctive chime sounds
- Selectable Hi/Lo frequency sound
- Choice of positive or negative chime trigger
- Two way flashing light
- Includes: Electronic chime with volume control and LED light, AES-1 Push Button, transformer and 26 ft. 4 conductor (AWG#22) wire with a 4-pin female connector installed at one end



2. Dimensions

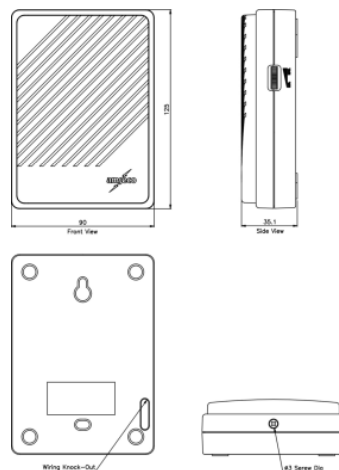

3. Specifications

Model Number	Rated Voltage	Chime Sound Output	Rated Current (Standby)	Rated Current (Activated)	Wiring Terminals	Trigger Signal (JP1)	Light Source (CM-4L)	Operating Temperature Range
CM-4L (Only Electronics chime & 26ft wire)	12V	0-85 dB	17mA	300mA	Ground(-) Positive(+)	ON:HIGH OFF:LOW	Super Bright L.E.D.'s	14°F ~ 122°F -10°C ~ 50°C)
CM-4L KIT								

The specification is subject to change without any prior notice for the improvement or modifications

. K&J Electronics Inc., Unit301-5F, Bucheon Technopark Ssangyong III,
#36-1 Samjeong-Dong, Ojeong-Gu, Bucheon-Si, Gyeonggi-Do, Korea

Tel: 82-(0)32-624-1200~3 Fax: 82-(0)32-624-1225 e-mail: Sales@knjelectronics.com