


Shock Sensors

BSD-20


Product Specifications

1. Features

- Transparent housing
- Over 1-second latch time on alarm
- UL grade ABS housing
- Current (DC 5V)
- Stand by: 2mA, In alarm: 10mA
- Sensitivity adjustable
- 3-conductor AWS #22 lead wire

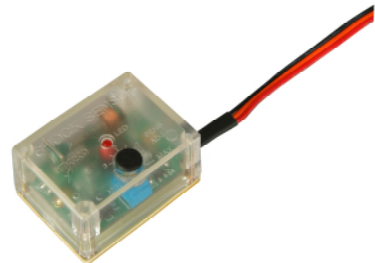

2. Dimensions

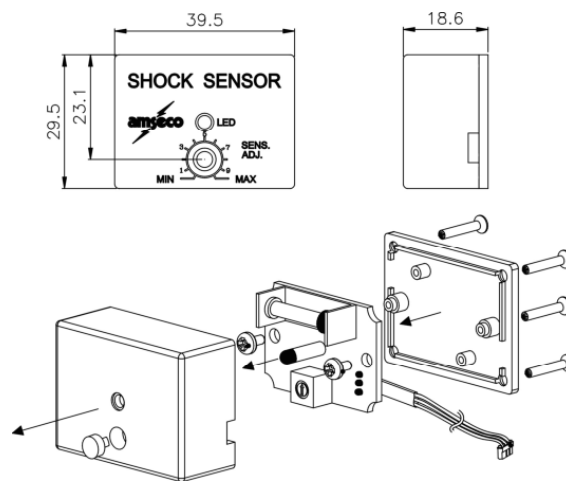

3. Specifications

Model	Carry Current		Operating Voltage	Latch Time In Alarm	Lead Wires	Operating Temperature Range
	Alert: 7mA	Detect: 10mA				
BSD-20	Alert: 7mA	Detect: 10mA	12VDC	0.5 seconds	1,800 ~ 1,850mm	(-10°C ~ 70°C)