

Door Announcer

EBP-407C


Product Specifications

1. Features

- Microprocessor driven system
- Independent entry/exit counters
- 20 ft. detection range across doorway
- Resettable 4-digit digital counter (up to 9999)
- Distinctive entry/exit chime sound
- Electrically erasable memory (EEPROM)
- Selectable detection range 10 ft. min., 20 ft. max.
- Chime volume control
- Expandable using additional chimes (CM-4)
- Doorbell feature using optional call button (AES-1)



2. Dimensions

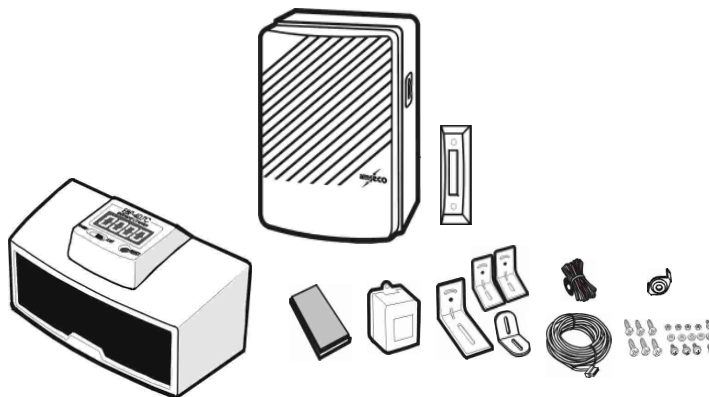

3. Specifications

Model Number	Detection Range	Light Source	Terminal (-)	Terminal (+)	Terminal (OC)	Terminal (IC)	Blocked Infrared beam Warning
EBP-407C	10ft. JP2=ON 20ft JP2=OFF (f.s.)	Inferred Pulse Beam 950mm	Ground Output	12V DC 1A Output	Exit Output (-) TR Output 1A	Entry Output TR Output 1A	JP1 Selective 10sec / 60 Sec / Off (f.s: 10sec)

The specification is subject to change without any prior notice for the improvement or modifications