

# Recessed Magnet Contact

## AMS-T10C


## Product Specifications

### 1. Features

- UL and ULC Listed
- Slim design for tight spaces
- 3/4" operating gap
- Alnico 5 magnet
- Available in white, brown, gray, or ivory
- Screw or 3M adhesive



### 2. Dimensions

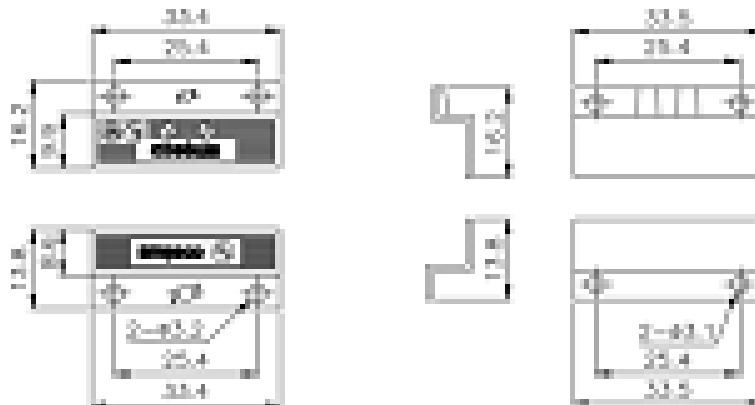

### 3. Specifications

| Model Number | Operating Gap | Contact Type | Max. Switching Current | Max. Carry Current | Breakdown Voltage | Rating | Magnet Type | Mounting Method           | Operating Temperature Range  |
|--------------|---------------|--------------|------------------------|--------------------|-------------------|--------|-------------|---------------------------|------------------------------|
| AMS-T10C     | 3/4"          | N.O          | 0.5A                   | 1.0A               | 200V DC           | 10VA   | Alnico 5    | Screw in Or Self-adhesive | 32°F ~ 120°F<br>(0°C ~ 49°C) |