

Surface Magnet Contact

AMS-37 Series

Product Specifications

1. Features

- UL and ULC Listed
- Rugged design for industrial use
- 2" operating gap
- Alnico 5 magnet
- Available in gray or brown




AMS-37A





AMS-37B


2. Dimensions

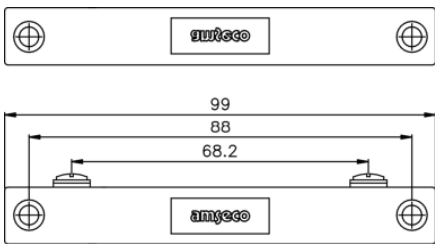

AMS-37A

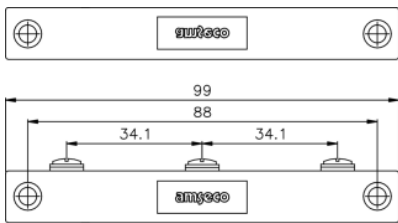

AMS-37B



3. Specifications

Model Number	Operating GAP	Contact	Contact Type	Max. Switching Current	Max. Carry Current	Breakdown Voltage	Rating	Magnet Type	Mounting Method	Operating Temperature Range			
AMS-37A	2"	Terminal	N.O	0.5A	2.0A	250V DC	10VA	Alnico 5	Screws	32°F ~ 120°F (0°C ~ 49°C)			
AMS-37B			N.C N.O	0.2A	0.5A	200V DC	3VA						
AMS-37L		24"Lead	N.O	0.5A	2.0A	250V DC	10VA						
AMS-37L 48		48"Lead	N.O										